

GATE OPERATOR


F10/15C

F10CA1 / F15C1

230
400 V

Up to
1500 kg

Speed
10,3 m/min

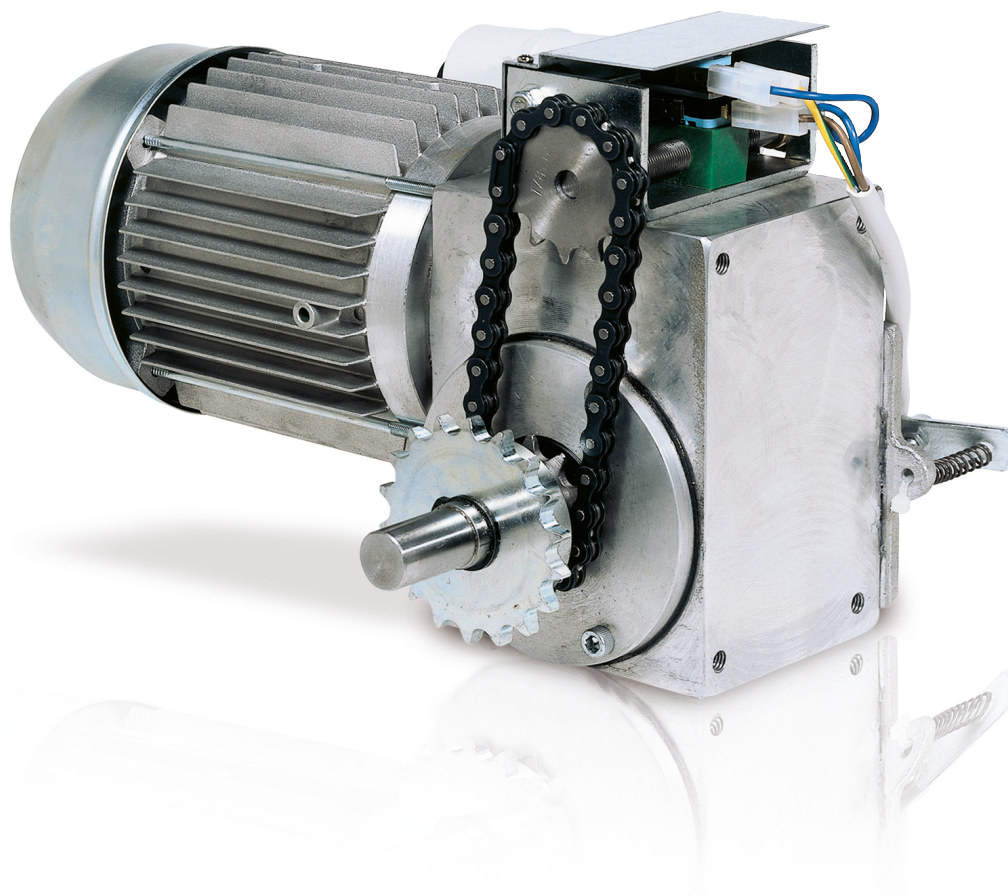

P-500F10CA1

230 V AC mono-phase chain drive sliding or folding door operator, complete with limit switches. Max. door weight 1000 kg.

P-500F15C1

400 V AC three-phase chain drive sliding or folding door operator, complete with limit switches. Max. door weight 1500 kg.



MADE IN
ITALY

FEATURES:


- commercial use
- for folding or sliding doors up to 1500 kg
- irreversible motor
- for folding doors with more than two folding leaves
- oil immersed operator with tempered steel screw and bronze gears for high performances and endurance

PROS:

- semi-intensive use
- also suitable for large doors
- built-in limit switches: fewer connections and quick installation

TECHNICAL DRAWINGS

Technical features	F10CA1	F15C1
Power supply	230 V AC (50 - 60 Hz)	400 V AC (50 - 60 Hz)
Motor power supply	230 V AC	400 V AC
Absorption	3,9 A	3,25 A
Power rating	720 W	1000 W
Duty cycle	50 %	55 %
Operating temperature	-20° C ÷ +55° C	-20° C ÷ +55° C
Motor thermal protection	150° C	150° C
Degree of protection	IP 40	IP 40
Output speed	10,3 m/min	10,3 m/min
Max. gate leaf weight	<1000 kg	<1500 kg
Gearmotor weight	13 Kg	13,6 Kg

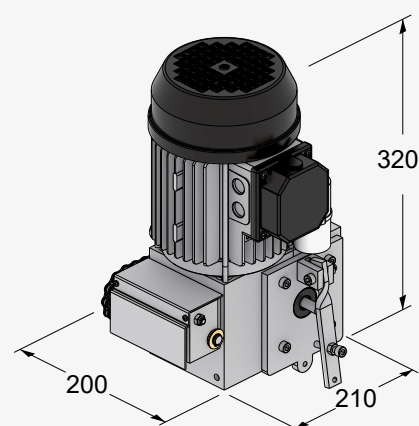

ACCESSORIES



P-550MS
Release system



P-550TEN
Chain stretcher



P-550CAT5
1/2" x 5/16" chain (5 m)



P-600D703
230/400 V electronic control unit for one gate operator with electrical brake



M-03083850LR
Limit switches



S-800B600100
F10/F15 Mounting plate



P-750COP2
Control unit box cover with 2 command buttons



P-750COP3
Control unit box cover with 3 command buttons



P-300PPI
Heavy duty pushbutton panel



P-250RXSM2
Self-learning, two-channel, 433,92 MHz plug-in radio receiver. Accepts up to 14 rolling code transmitters or unlimited dipswitch transmitters



P-900OPTIC
Set of infrared safety photocells, 12/24 V, surface mount, beam alignment adjustable up to 15°, up to 20 m range



P-900VLED-AT
230 V AC white led flashing light