

**P-650EASY-BRDX - P-650EASY-BRSX**

Fast DC right or left operator with encoder complete with hinged arm. Max. gate leaf 2,3 m.

P-650EASY-QBRDX - P-650EASY-QBR SX


Fast DC right or left operator complete with built-in control unit, rolling code radio receiver and hinged arm. Max. gate leaf 2,3 m.



Accessories for EASY series
Page 112



Further accessories:
Transmitters page 238
Photocells page 243
Flashing lights page 246



MADE IN
ITALY

HIGH SPEED

Ready for a new challenge.



+45% SPEED

Percentage calculated in comparison with the 230 Volt version



ALWAYS WORKING

Works also during power failures



PROTECT YOUR FAMILY

Close the gate quickly to protect your family

EASY-BR e EASY-QBR opening time = 9 s




EASY e EASYQR opening time = 16 s



SAVES TIME

TECHNICAL DRAWINGS

Technical features	EASY-BR	EASY-QBR
Power supply	230 V AC (50 - 60 Hz)	
Motor power supply	24 V DC	
Open circuit voltage	0,5 A	
Power rating	120 W	
Opening time 90°	9 s	
Duty cycle	100 %	
Operating temperature	-20° C ÷ +55° C	
Motor thermal protection	-	
Degree of protection IP	IP 44	
Electronic control unit	-	D749MA-R

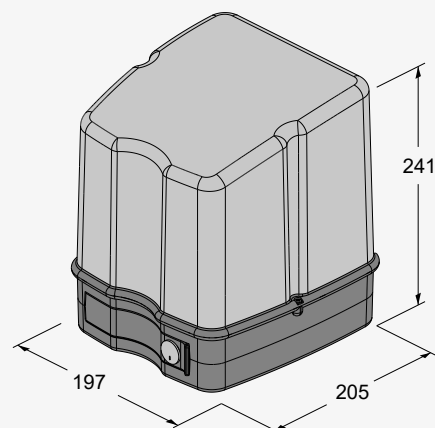

ACCESSORIES

COMMON ACCESSORIES



P-650KITCEASY
"Easy" mechanic limit switches kit



P-150KITBAI
Easy arm joint for sloping doors



P-650BRCE1
Straight arm with driving track



P-700BAP
Gate stopper for heavy leaves



P-700BAP1
Gate stopper for light leaves



P-700BAP2
Gate stopper wall/floor mount



P-650ESV1 / P-650ESV2
Vertical electric lock recommended for leaves longer than 3 m (1=LEFT - 2=RIGHT)



P-650ES1 / P-650ES2
Horizontal electric lock recommended for leaves longer than 3 m (1=LEFT - 2=RIGHT)



P-650ESE
External emergency release device with tamper-proof housing and 5 m cable



P-900TOWERF
Photocell standard mounting post, painted aluminium, 49 cm, with removable cover for easy installation and photocell adjustment



P-750COL
Control unit mounting post



P-650CVS
Curved manual lock

18/24 VOLT ACCESSORIES



P-750D749MA
Electronic control unit for one or two DC gate operators with encoder, complete with 433,92 MHz rolling code radio receiver, battery charger, transformer and enclosure



P-750D749MA-R
Electronic control unit for 1-2 DC fast operators with encoder, complete with 433,92 MHz rolling code radio receiver, battery charger, transformer and enclosure



P-200KBE
Back-up battery kit



M-030000CC50
Multicore cable (2 x 2.5 sq.mm + 3 x 0.5 sq.mm)

⚠ Use only M-030000CC50 cable or equivalent




P-250T-WIFI
Device for Wi-Fi connection 2,4 GHz to allow the smartphone to remotely control and program the control units via TauApp




P-250T-CONNECT
Ethernet + Wi-Fi device - to enable through Tau Open 2.0 application, the use of the smartphone remotely, to open/close and check the status of the gate

INSTALLATION SIZES (MM)

EASY - Installation (mm)

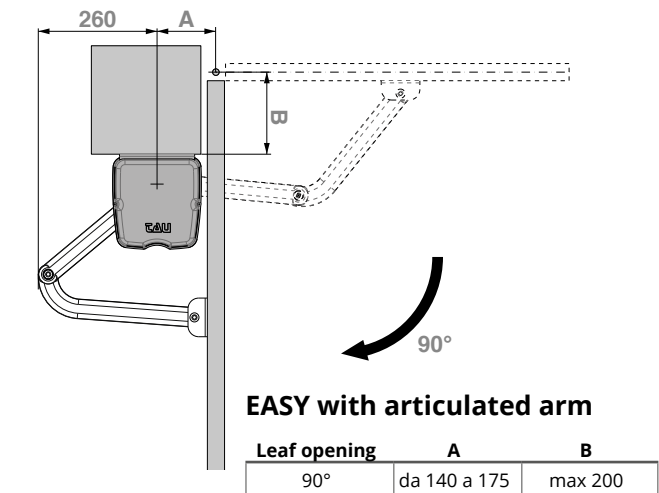


BRCE1 - Installation (mm)

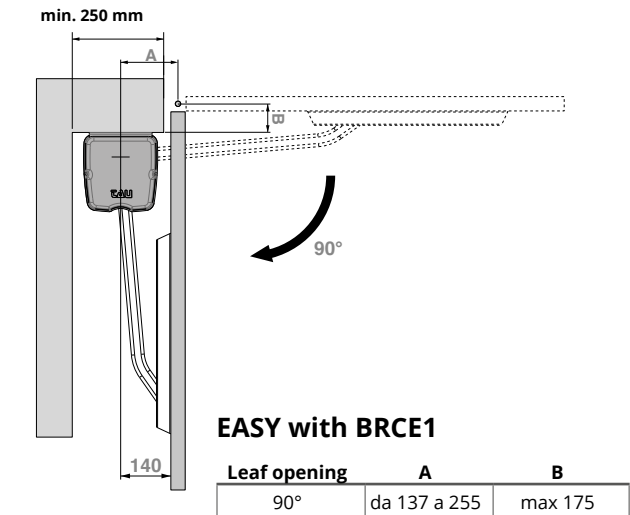

LIMIT TO USE*

If the leaves are closed or less than 70% open, and the gate is installed in windy areas, the indicated lengths must be reduced by 30%.

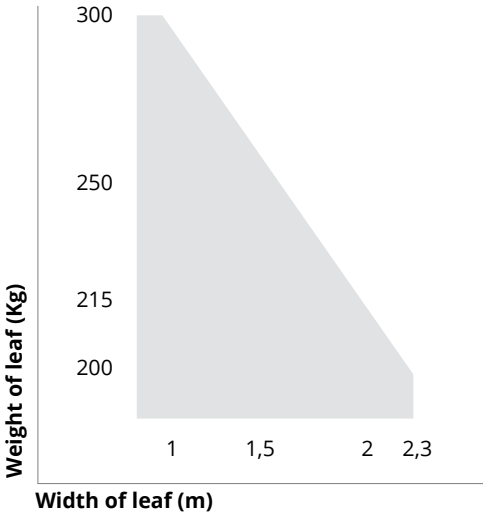

Use and maintenance manuals



EASY



D749MA



D749MA-R



D770M